

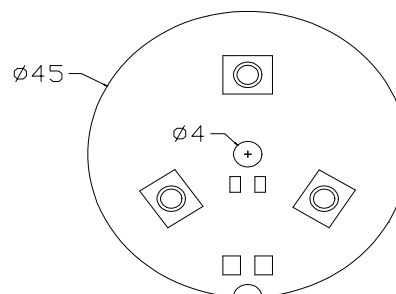
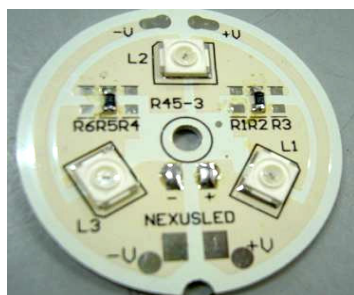


## R45-3




Model	Wavelength or CCT	Input Voltage	Input Current	Input Power	Brightness per LED	No. of LED	PCB Material	Module Weight	PCB Temp. (Ta = 30°C)
R45-3-SW	6500K	12 V	120 mA	1.44 W	25 lm	3	Aluminium	6 gram	56 °C
R45-3-SF	3500K	12 V	120 mA	1.44 W	20 lm				56 °C
R45-3-HW	6500K	12 V	350 mA	4.2 W	70 lm				68 °C
R45-3-HF	3500K	12 V	350 mA	4.2 W	50 lm				68 °C
R45-3-HG	525nm	12 V	350 mA	4.2 W	21 cd				68 °C
R45-3-HB	470nm	13 V	350 mA	4.2 W	8 cd				68 °C

## SNB1



Model	Wavelength or CCT	Input Voltage	Input Current	Input Power	Brightness per LED	No. of LED	PCB Material	Module Weight	PCB Temp. (Ta = 30°C)
SNB1-SW	6500K	4 V	120 mA	0.48 W	25 lm	1	Aluminium	4 gram	48 °C
SNB1-SF	3500K	4 V	120 mA	0.48 W	20 lm				48 °C
SNB1-R	625nm	3 V	350 mA	1.05 W	10 cd				62 °C
SNB1-Y	587nm	3 V	350 mA	1.05 W	12 cd				62 °C
SNB1-G	525nm	4 V	350 mA	1.4 W	21 cd				65 °C
SNB1-B	470nm	4 V	350 mA	1.4 W	8 cd				65 °C
SNB1-W	6500K	4 V	350 mA	1.4 W	70 lm				65 °C
SNB1-F	3500K	4 v	350 mA	1.4 W	50 lm				65 °C

## N3-6A5

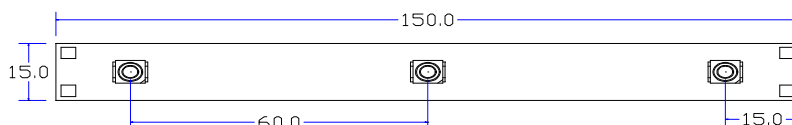

Model	Wavelength or CCT	Input Voltage	Input Current	Input Power	Brightness per LED	No. of LED	PCB Material	Module Weight	PCB Temp. (Ta = 30°C)
N3-6A5-SW	6500K	12 V	120 mA	1.44 W	25 lm	3	Aluminium	11gram	52 °C
N3-6A5-SF	3500K	12 V	120 mA	1.44 W	20 lm				52 °C
N3-6A5-HW	6500K	12 V	350 mA	4.2 W	70 lm				62 °C
N3-6A5-HF	3500K	12 V	350 mA	4.2 W	50 lm				62 °C
N3-6A5-HG	525nm	12 V	350 mA	4.2 W	21 cd				62 °C
N3-6A5-HB	470nm	13 V	350 mA	4.2 W	8 cd				62 °C